Paquin Sensors.
2816 Blue Ridge Blvd
West Union, SC 29696

Toll Free: 1-800-831-8217
Fax: 864-653-1047
Web Site: www.paquinsensors.com
Email: paquinsensors@paquin.com

Installation Instructions for EPA High Pressure Switches

Adjusting the Set Point:

(Switch is factory set at the lowest value of the adjustment range)

- Insert a 5/64" allen key into hole for the adjustment screw.
- Remove adjustment plug at top and insert allen key
- For adjustment, turn the screw clockwise to increase the set point or counter-clockwise to decrease until desired set point is reached
- Re-Insert adjustment plug once the desired set point is reached. (Failure to do this will void the warranty)

Contact	Spade (Fig 1)	Integral Deutsch (Fig 2)	Flying Leads (Fig 3)
Common	C	Pin 1	Black
N. Closed	NC	Pin 2	Green
N. Open	NO	Pin 2	Red

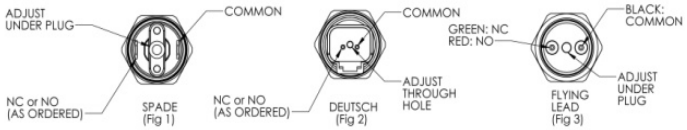

OPERATING CHARACTERISTICS

	ADJUSTMENT RANGE (PSI)	AVERAGE DIFFERENTIAL (PSI)	PROOF PRESSURE (PSI)
EPA - 1	1.5 - 30	Less than 10% of Actuation Point, See Paquin data sheet for additional specifications	9000
EPA - 1A	14.5 - 200		9000
EPA – 2	125 - 600		9000
EPA - 3	300 - 2500		9000
EPA - 4	3000 - 6000		9000
EPA - 5	500 - 3500		9000