





Model: SMLN

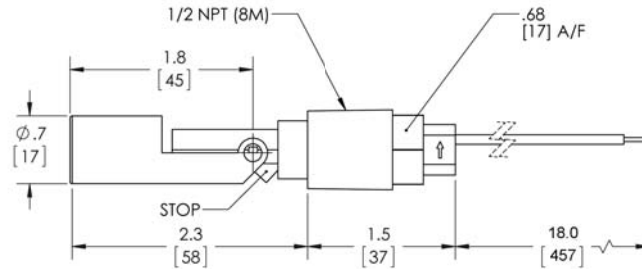

Model: SMLC

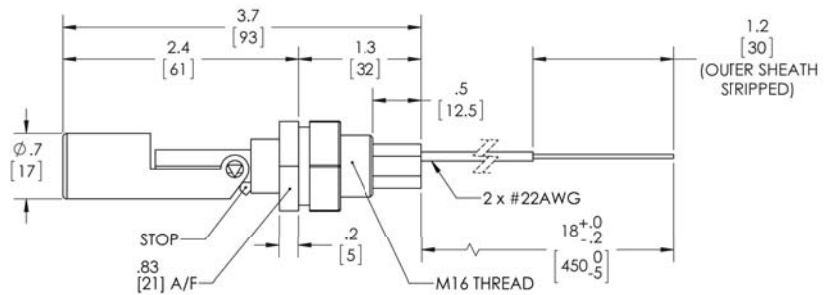

The **SML** series is a horizontal mount level switch ideal for monitoring Water and Oil levels

**ELECTRICAL:**

Voltage: AC220V/1A; DC24V/0.5A  
Switch rating: 70VA  
Wires: 18" long cable, 22 gauge

**CIRCUIT:**

Normally Open / Normally Closed

**HOUSING MATERIAL:**

Housing: Polypropylene  
Optional: Stainless Steel  
Float: Polypropylene  
Optional: Stainless Steel

**WORKING TEMPERATURE:**

Polypropylene: -4°F to +176°F (-20° to +80°C)  
Stainless Steel: -4°F to +212°F (-20° to +100°C)

Depending on the mounting position, the float on the switches can either rise or lower with the liquid level. By rotating the switch 180°, the switch operation can be Normally Open or Normally Closed

**ORDERING INFORMATION**

<b>SMLN</b>	<b>- 8M</b>	<b>- C</b>	<b>- *SS</b>
<b>Model</b>	<b>Connection</b>	<b>Terminal</b>	<b>Options</b>
SMLN - npt external mounting SMLC - internal clamp mounting	8M - 1/2" NPT (SMLN only) M16 - M16 (SMLC only)  Consult Factory for Other Connections	C - 18" standard cable length  Consult Factory for other than standard length	* - Omit if Standard SS - Stainless Steel